

new



ELECTRIC STEAM GENERATOR

THE PERFORMANCE CLASS

GENERATION E

CERTUSS

E320MX



CERTUSS
E320MX

**INCREASED OUTPUT
[MODULAR]**

- _The steam generator is ready for use 3–5 minutes after starting up the system and the equipment design guarantees continuous regulation of the steam output from **0 TO 320 KG/H.**
- _Each module can be expanded up to an output of **160 KG/H.**
- _The new **GENERATION E** comes in eleven sizes with regard to output.



CERTUSS
E320MX

**COMPACT
[SPACE-SAVING]**

- _The compact design decreases the space requirement by up to 25%.
- _Equipment dimensions match **STANDARD DOOR SIZE** (80 cm) for efficient assembly.
- _Modular design enables the greatest variety because the modules can be arranged as desired.

CERTUSS
E320MX

HMI
[EASY CONTROL]

- _The new **HUMAN-MACHINE INTERFACE** guarantees easy, intuitive control in 16 languages.
- _When steam demand varies, the technology enables intelligent pressure adjustment and reduces consumption.
- _It also allows for **CONDITION MONITORING** and **REMOTE SERVICES** and meets all of the requirements for Industry 4.0.



CERTUSS
E320MX

ONE-VIEW CONTROL
[REMOTE CONTROL]

- _The **LED STATUS DISPLAY** and the **WATER LEVEL DISPLAY** at the front of the equipment provide continuous assurance regarding equipment condition at a glance.





CERTUSS

E320MX

INSTALLATION [EFFICIENT]

_The optional integrated **WATER MODULE MX-CPA** simplifies installation and lowers costs.

_The fully automatic **72-HOUR OPERATION** increases efficiency.



CERTUSS

E320MX

EASY ACCESS [MAINTENANCE ADVANTAGE]

_ **FLEXIBLE ACCESS POINTS** make maintenance quick and easy.



CERTUSS

E320MX

FILTER REPLACEMENT [MAINTENANCE ADVANTAGE]

—The **DOUBLE DOOR** allows the filter to be replaced easily and quickly without specialized training.




CERTUSS

E320MX

COOLING [INTEGRATED]


—The optional **SWITCHING CABINET COOLING FUNCTION** ensures operation even at high temperatures.

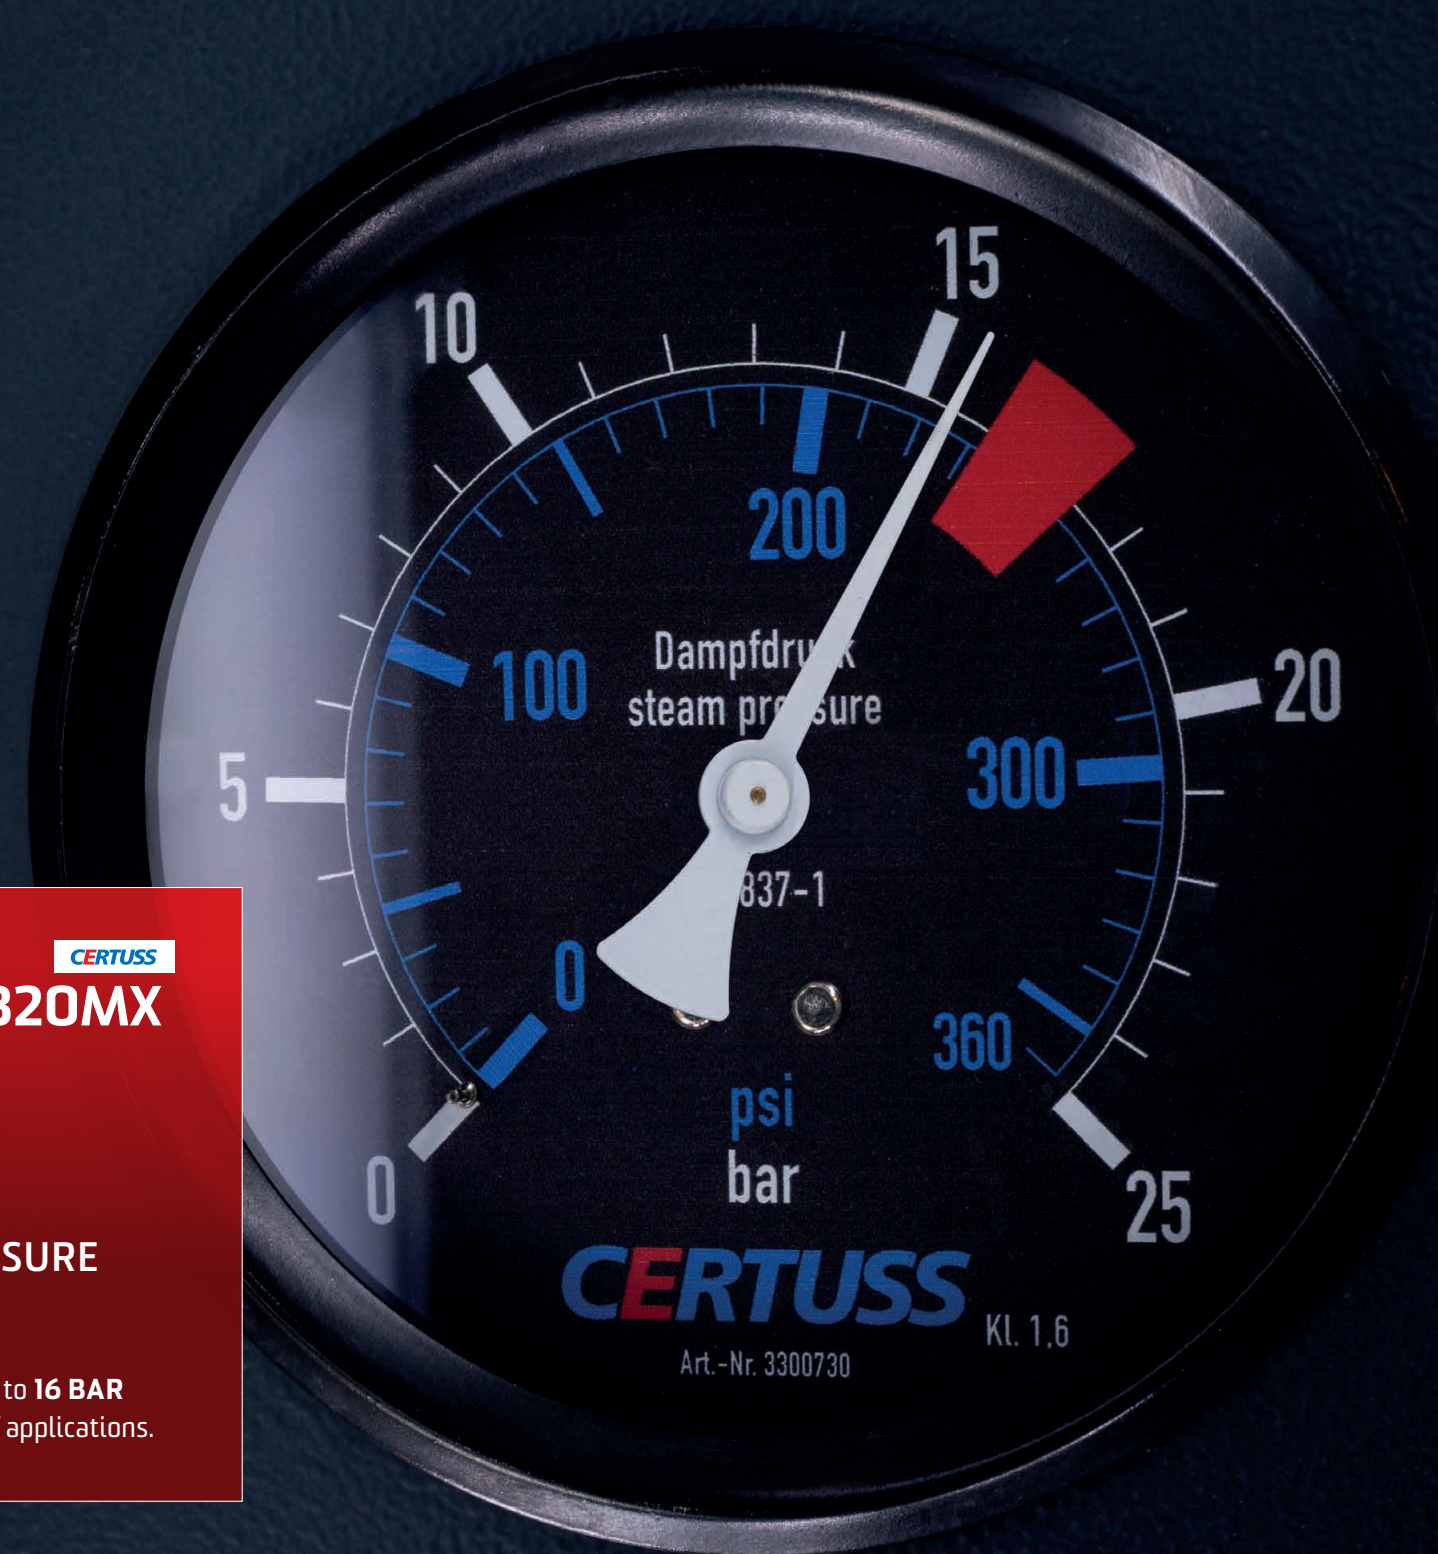

CERTUSS
E320MX

**OPERATING PRESSURE
[UP TO 16 BAR]**


Safe operating pressure up to **16 BAR**
guarantees a wide range of applications.

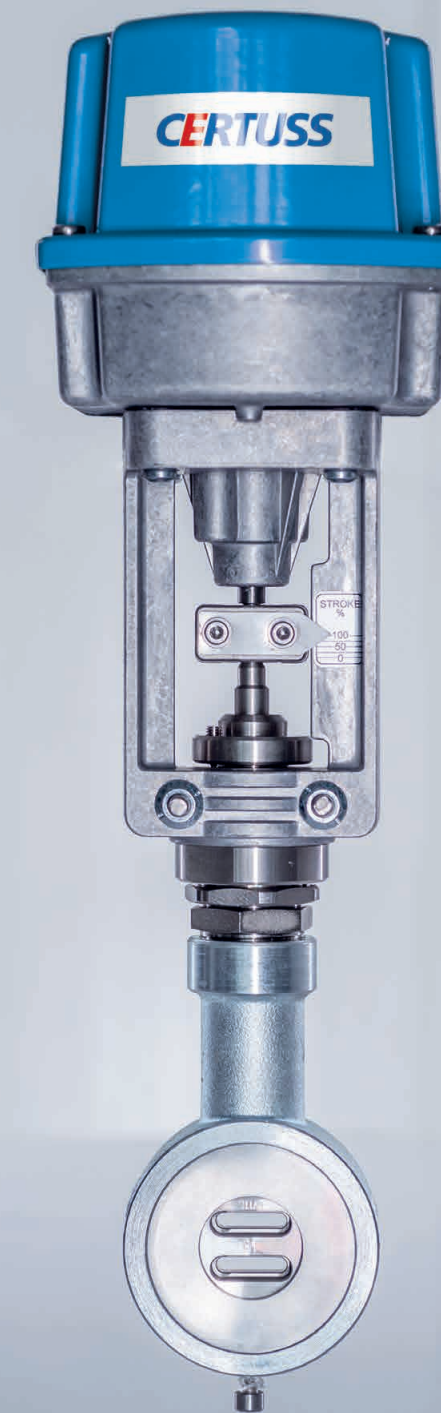

CERTUSS
E320MX

**CONTROL
[PLUS]**

The proven **THERMOTIMAT-PLUS CONTROL** is optional. It provides corrosion protection; constant boiler pressure and consistent steam quality increase process reliability.

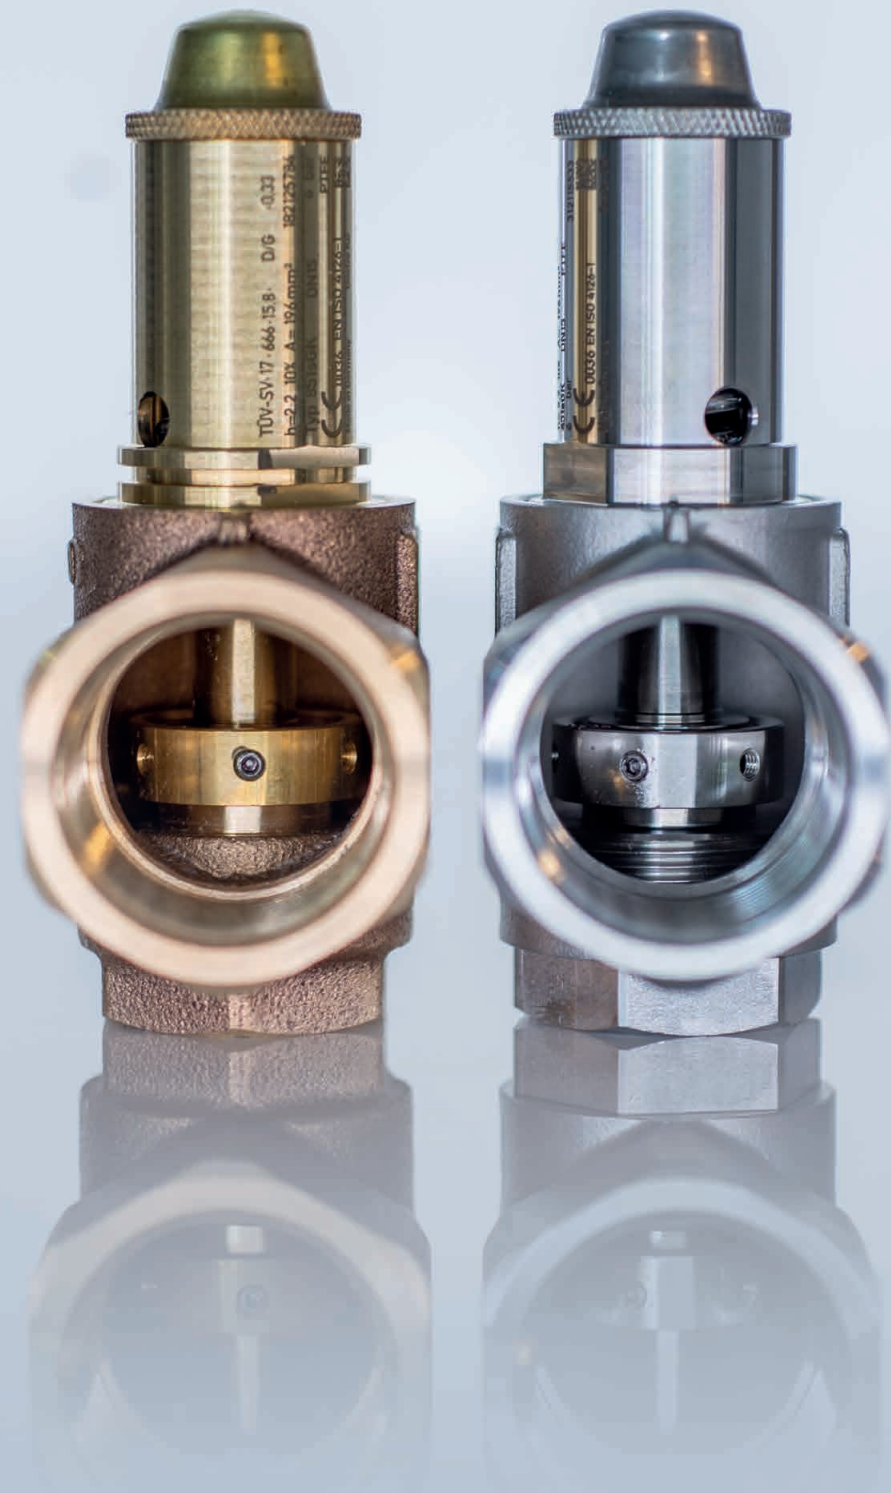

CERTUSS

E320MX

STEAM
[QUALITY]

_Steam can be produced for **INDUSTRIAL** or **CULINARY** needs based on the application.



CERTUSS

E320MX

LOW WEAR
[LONG LIFE]

_The new **LONG LIFE DESIGN** guarantees high durability, reliability, and long service life.

THE PERFORMANCE CLASS

GENERATION E



- _INCREASED OUTPUT
[MODULAR]
- _COMPACT
[SPACE-SAVING]
- _HMI
[EASY CONTROL]
- _ONE-VIEW CONTROL
[REMOTE CONTROL]
- _INSTALLATION
[EFFICIENT]
- _EASY ACCESS
[MAINTENANCE ADVANTAGE]
- _FILTER REPLACEMENT
[MAINTENANCE ADVANTAGE]
- _COOLING
[INTEGRATED]
- _OPERATING PRESSURE
[UP TO 16 BAR]
- _CONTROL
[PLUS]
- _STEAM
[QUALITY]
- _LOW WEAR
[LONG LIFE]
- _DESIGN
[HYBRID VERSION]

CERTUSS
E10MX

CERTUSS
E20MX

CERTUSS
E40MX

CERTUSS
E60MX

CERTUSS
E80MX

CERTUSS
E100MX

CERTUSS
E130MX

CERTUSS
E160MX

CERTUSS
E200MX

CERTUSS
E260MX

CERTUSS
E320MX



WE'D BE HAPPY TO ASSIST YOU



RAY TIMMINS
General Manager at
CERTUSS UK



WESLEY THOMPSON
Sales Manager at
CERTUSS UK



CARL DAVIS
Sales Engineer at
CERTUSS UK

CERTUSS

CERTUSS (UK) LTD

Unit 45 Phoenix Business Park
Avenue Road
Birmingham
B7 4NU
+44 (0)121 327 5362
info(at)certuss.co.uk
www.certuss-emx.com

